


複動油圧シリンダ

BRD-タイプ 40~250KN

- 4~25TON
- 最高使用圧力：70MPa

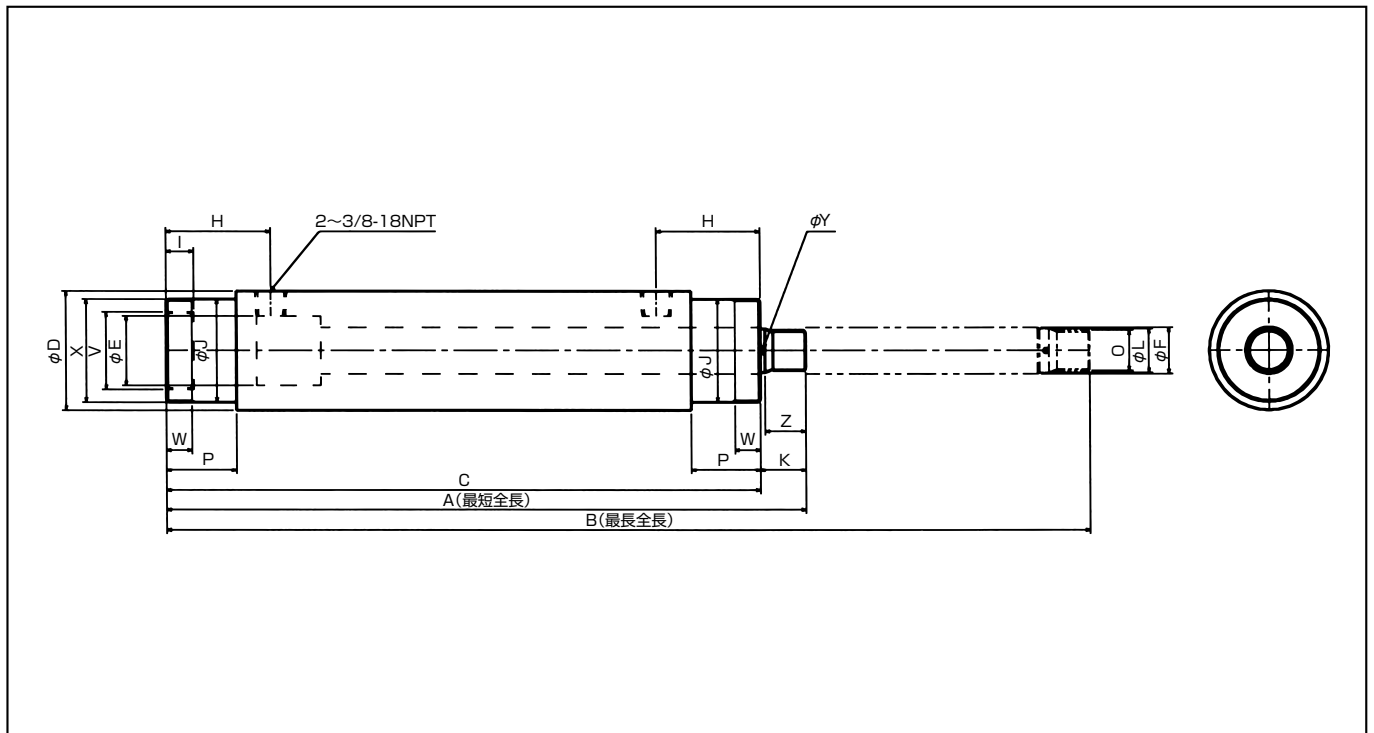

品番	能力 KN	ストローク mm	受圧面積 cm ²	必要油量 cm ³	寸法 (mm)															重量 kg			
					A (最短全長)	B (最長全長)	C	D (シリンダ 外径)	E (ボア 径)	F (ラム 直径)	H (油口 位置)	I (内ねじ 長さ)	J	K	L	P	O	V	W		X	Y	Z
BRD-41APJ		28		押引 14 7	186.5	214.5	162															2.0	
BRD-43APJ	押 33.6 引 16.2	79	押 4.90 引 2.36	押引 39 19	237.5	316.5	213	51	25	18	47	(12.5)	42	24.5	18	29	M16×1.5	M30×1.5	11	M42×1.5	ϕ 2.7	20.5	2.6
BRD-46APJ		155		押引 76 37	313.5	468.5	289															3.6	
BRD-91APJ		28		押引 32 18	225	253	198															3.0	
BRD-93APJ	押 77.8 引 44.1	79	押 11.34 引 6.43	押引 90 51	276	355	249	64	38	25	57	(13)	56	27	25	38	M22×1.5	M42×1.5	14	M56×2	ϕ 3.2	22.5	4.2
BRD-96APJ		155		押引 176 100	352	507	325															5.6	
BRD-910APJ		257		押引 292 166	454	711	427															7.3	
BRD-166	押 140 引 75	160	押 20.3 引 10.7	押引 325 171	389	549	359	77	50.8	35.0	73	(24)	70	29	32	54	M30×1.5	M56×2	22	M70×2	ϕ 4.2	28.5	10.2
BRD-1610		260		押引 528 278	491	751	461															14.5	
BRD-256	押 220 引 97	160	押 31.6 引 13.9	押引 507 235	424	584	397	93	63.5	47.8	89	(26)	85	27	45	70	M42×1.5	M70×2	29	M85×2	ϕ 5.2	25.4	16.0
BRD-2510		261		押引 827 364	525	786	498															20.3	